



Trimble MX7

MOBILE IMAGING SYSTEM

ENTER THE WORLD OF MOBILE IMAGING

The Trimble® MX7 Mobile Imaging System with VISION™ technology, is a vehicle-mounted photogrammetric system that makes it easy to quickly and completely capture road and site infrastructure information. Capture 360-degree, 30 megapixel geo-referenced images at highway speeds to rapidly reduce project field time. Then, use Trimble Trident™ office software to extract and analyze your collected data. The Trimble MX7 is the ideal solution for organizations looking to enter the world of mobile imaging with a smaller investment.

Rapid Collection of Geo-Referenced Images

Capture a 30 megapixel panoramic image of the surrounding environment in static or mobile—up to highway speed—modes with the Trimble MX7. Equipped with six, 5 megapixel cameras and Trimble Applanix® GNSS and inertial geo-referencing modules, the Trimble MX7 enables you to manage assets—such as bridges, buildings, roads, highways, and power stations—and document site conditions with geo-referenced images. This compact, lightweight, and rugged sensor can be mounted on vehicles of all sizes.

System control and data recording functions are controlled wirelessly through any WiFi enabled PC or tablet device. Trimble Mobile Imaging Software is available with the system and offers a clear, intuitive user interface—making it easy to use—allowing the operator to rapidly set system parameters and manage data recording.


Capture Now, Measure Later

Avoid site rework and benefit from increased quality control and data validation by capturing the data now and measuring later. The Trimble MX7 allows you to visually observe and capture the job site, then produce deliverables in the office later using Trimble Trident and Applanix POSPac™ MMS software. For post-processing requirements, use Trimble's powerful Applanix POSPac MMS software.

Trident Imaging Hub software is available with the system and offers robust object positioning, measurement, data layer creation, and analysis of geo-referenced imagery. This powerful software gives you the ability to extract additional data and features without having to re-visit the site.

Key Features

- ▶ Versatile system offers significant operational flexibility
- ▶ Six 5 megapixel cameras provide rapid 360-degree image documentation
- ▶ Precision positioning using tightly coupled GNSS and inertial referencing system
- ▶ Deploys on all sizes of on- and off-road vehicles
- ▶ Use with Trimble Mobile Imaging Capture software and Trimble Trident office software for data capture, extraction and analysis


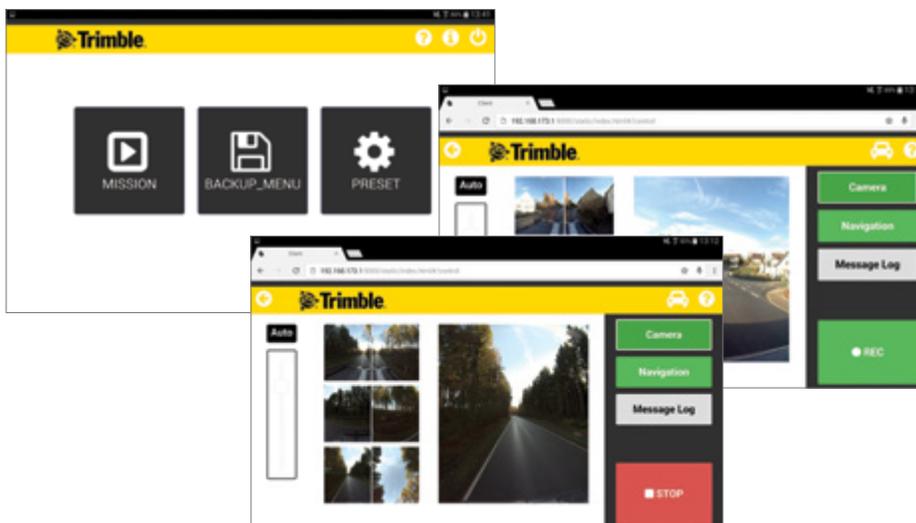


Trimble MX7 MOBILE IMAGING SYSTEM

SOFTWARE

Trimble Trident

- ▶ Trajectory import
- ▶ 360° imagery and vector data visualization
- ▶ Database connectivity
- ▶ GIS Layer Form creation
- ▶ Photogrammetric feature addition
- ▶ 3D measurements
- ▶ Attribute addition as of user selected snippets or object coding
- ▶ Image converter
- ▶ SHP/DXF import and export
- ▶ Export / Data conversion of MX7 data to Orbit GT and Horus

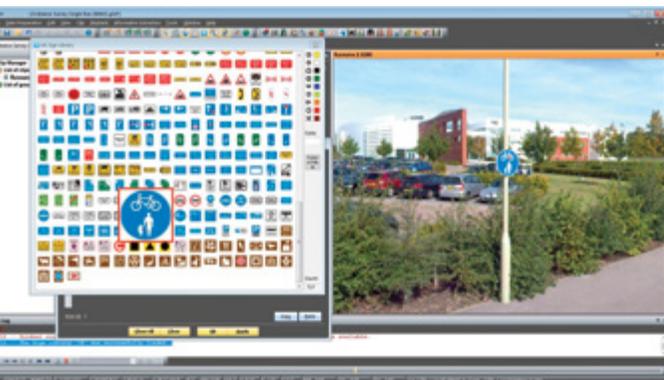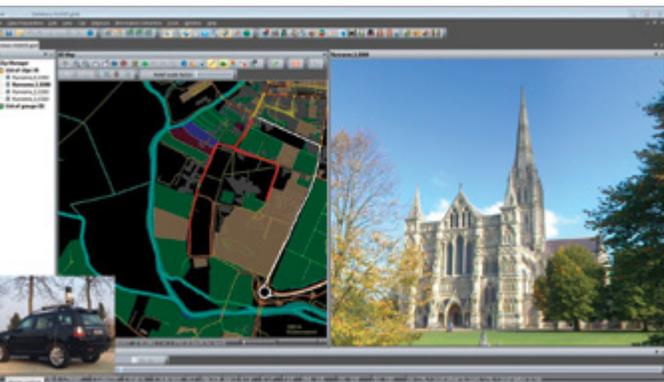

PERFORMANCE AND SPECIFICATION

| System Specification | |
|-----------------------|---------------------------------|
| Resolution | 30 MP (5 MP x 6 sensors) |
| Field of view | 90% of full sphere |
| Spherical distance | Calibrated from 2 m to infinity |
| Operating temperature | 0 °C to +35 °C |
| Power | 12 V to 24 V DC (typical 100 W) |
| Weight | 11.3 kg |

| Positioning Sub-system (RMS Error) ¹ | |
|--|--|
| Type | Trimble AP15 GNSS-Inertial System |
| Technology | Advanced Applanix IN-Fusion™ GNSS-Inertial integration technology |
| # of GNSS channels | 220 |
| Inertial measurement unit | Applanix IMU-69 (non ITAR) with 200 Hz data rate |
| Position (m): No GNSS outages ^{2,4} 1 km or 1 minute GNSS outage ^{2,4} | 0.02–0.05 (post-processed) ² 0.2–0.8 (post-processed) ² |
| True Heading (deg): No GNSS outages ^{2,4} 1 km or 1 minute GNSS outage ^{2,4} | 0.08 (post-processed) ³ 0.2 (post-processed) ³ |

| Options | |
|-------------|--------------------------------------|
| Analysis | Applanix POSPac MMS |
| Positioning | Distance measurement indicator (DMI) |

1 Typical performance in a standard road vehicle with appropriate initialization and dynamics. Actual results are dependent upon satellite configuration, atmospheric conditions and other environmental effects.
 2 Typical mission profile, max RMS error.
 3 POSPac MMS.
 4 With DMI option.

Specifications subject to change without notice.

Contact your local Trimble Authorized Distribution Partner for more information

NORTH AMERICA
 Trimble Navigation Limited
 10368 Westmoor Dr
 Westminster CO 80021
 USA

EUROPE
 Trimble Germany GmbH
 Am Prime Parc 11
 65479 Raunheim
 GERMANY

ASIA-PACIFIC
 Trimble Navigation Singapore Pty Limited
 80 Marine Parade Road
 #22-06, Parkway Parade
 Singapore 449269
 SINGAPORE

